



Shown with optional
887 Cover Feeder

SINGLE-CLAMP HOT-MELT PERFECT BINDER

882 Perfect Binders

ROSBACK

Performance & Finishing Features Designed for runs of hundreds and thousands... built for thousands of runs.

The Model 882 Perfect Binder, designed for medium length production runs and quick changeover, meets the requirements for the in-plant shop, commercial printer and trade binders. Fully operator oriented, the 882 combines dependability and flexibility; consistent top-quality professional results are easily achieved.

STATE-OF-THE-ART PERFORMANCE FEATURES:

- Large capacity clamp
- Heavy-duty motor for milling cutter and notcher
- Centrally located controls
- Automatic self-adjusting nipper for various book widths
- Integrated book counter
- Total system monitoring
- Quick changeover to pad mode

882 Perfect Binder Specifications	
Sheet Sizes	
Min Book Thickness	1/8" (3mm)
Max Book Thickness	2" (50mm)
Min Page Width x Spine Length	2-1/2" (63mm) x 4" (101mm)
Max Page Width x Spine Length (see options)	12" (304mm) x 15-1/2" (393mm)
Max Spine Milling Depth	5/32" (4mm)
Dimensions	
Length (with Conveyor attached)	69" (1.75 m)
Width	84" (2.13 m)
Height	43-1/2" (1.11 m)
Weights	
Net	850 lbs. (386 kg)
Shipping	1315 lbs. (596 kg)
Export Shipping	1530 lbs. (694 kg)
Electrical*	
Standard**	230 vac, 60Hz, 3Ph, 30 amp
Motor	3hp milling head motor
Speeds	
Cycle	Up to 600
Production	Up to 450 Books/Hr

*Contact Rosback for alternate electrical requirements.

**If voltage is lower than 230 Volts, customer should provide a minimum of 0.750 KVA Buck & Boost transformer.

Design Specifications Subject To Change Without Notice.


AVAILABLE OPTIONS & ACCESSORIES:

- 17" (43.2 cm) Max Spine Length
- 19-1/2" (49.5 cm) Max Spine Length
- Cover Feeder (Model 887)*
- Cover Joggers* (available only with 887)
- Conveyor Delivery Table
- Padding Glue (48 lbs. box)
- Padding Attachment
- Glue (48 lbs. box)
- Fume Extractor

*Note: Purchase 882 & 887 together and get cover joggers free.

882 STANDARD EQUIPMENT:

- 10 lbs. Glue
- 1-Side Gluing Attachment
- 1-Rougher/Notching Blade
- 1-Integrated Book Counter
- 1-Drop Tray Delivery
- 1-Tool Kit
- 1-Spare Parts Kit

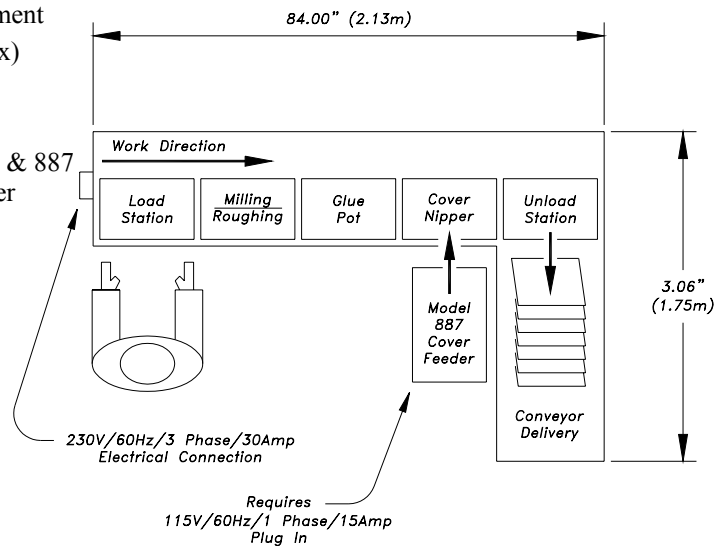


Master Control Station

Centrally located and includes book counter display.



Clamp Assembly

Adjustable clamp pressure securely holds books throughout the binding cycle.



Mil Cutter & Notcher

Carbide cutter with built-in notcher provides for maximum glue penetration.




Removable Glue Pot

Removable glue pot holds a generous glue supply and rapidly adjusts for quick setup.



Glue Pot Rollers

Twin rollers apply glue to book spines and the amount is adjustable for each roller.



Nipper Table & Cover Stops

Positive stops align the book covers. Nipper plates automatically adjust for various book thicknesses.

*Optional Cover Joggers are available.

ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA

Phone: (269) 983-2582 * Fax: (269) 983-2516

Internet: www.rosbackcompany.com * E-mail: rosbacksales@qtm.net

Your Dealer: